



Club Car Precedent


TROJAN 12 VOLT T-1275 BATTERIES
2008-Present

Part #: GCCP-KITC-08BC

Rev. 5 1-15-2015

Please follow the sketch precisely as shown.
Installation Instructions: Lay preassembled kit on top of batteries exactly as shown in sketch. Push straight down on each valve until it snaps into the cell. Make sure all tubing remains unobstructed. If there are any questions concerning installation, please call Battery Watering Technologies at 877-522-5431.

Note: Use VB-TBY Valve

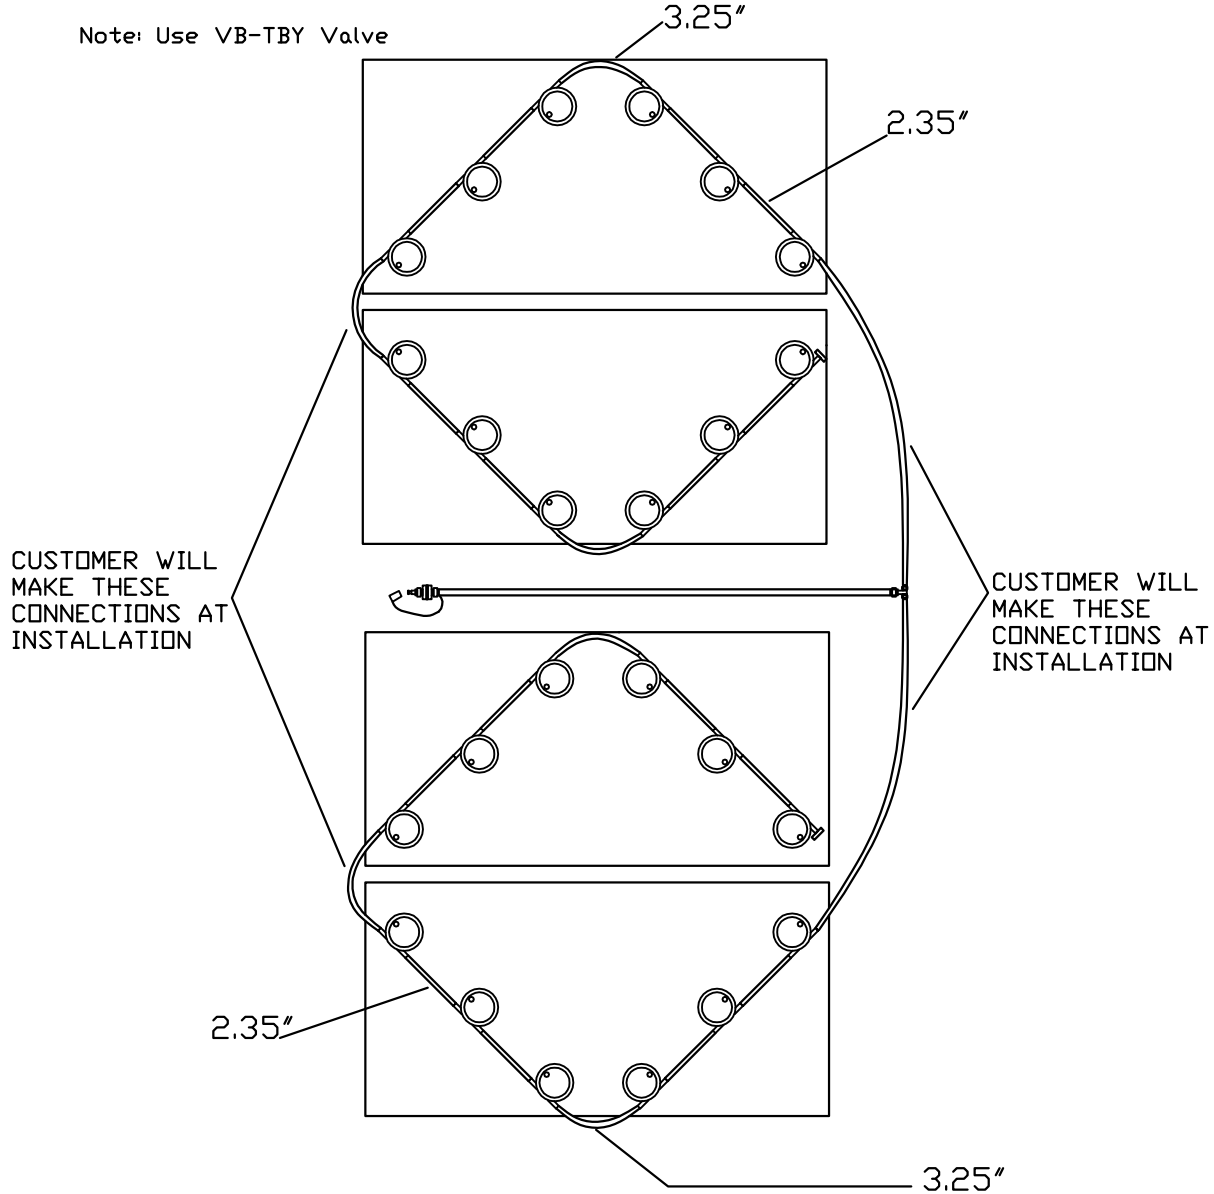

Please water batteries after charge and do not leave unattended

Note: Ship end caps, 18 inch fill tube with connector and T-piece, and 4 feet of tubing separate for the customer to make final connections at installation.

Operation Instructions:

Please water batteries after charge and do not leave unattended

Connect the Delivery system (2 1/2 gallon tank, direct fill link, or direct fill gun) to single point on kit. Insert male quick connect into female to start water flow. When flow indicator stops spinning or all indicator eyes come to top of the valve, disconnect quick connect.

Always disconnect from water source after filling

6645 Holder Road,
Clemmons, NC 27012

Phone: 336-714-0448
Fax: 336-714-0449