



# E-Z-GO RXV

REV. 8 10-13-16


## US Battery (US12VRX)

### GEZ48-KITBCUS3


Please follow the sketch precisely as shown.

Installation Instructions: Lay preassembled kit on top of batteries exactly as shown in sketch. Push straight down on each plug until it snaps into the cell. Make sure all tubing remains unobstructed. If there are any questions concerning installation, please call Battery Watering Technologies at 877-522-5431

Note: Use VB-TBU Valve

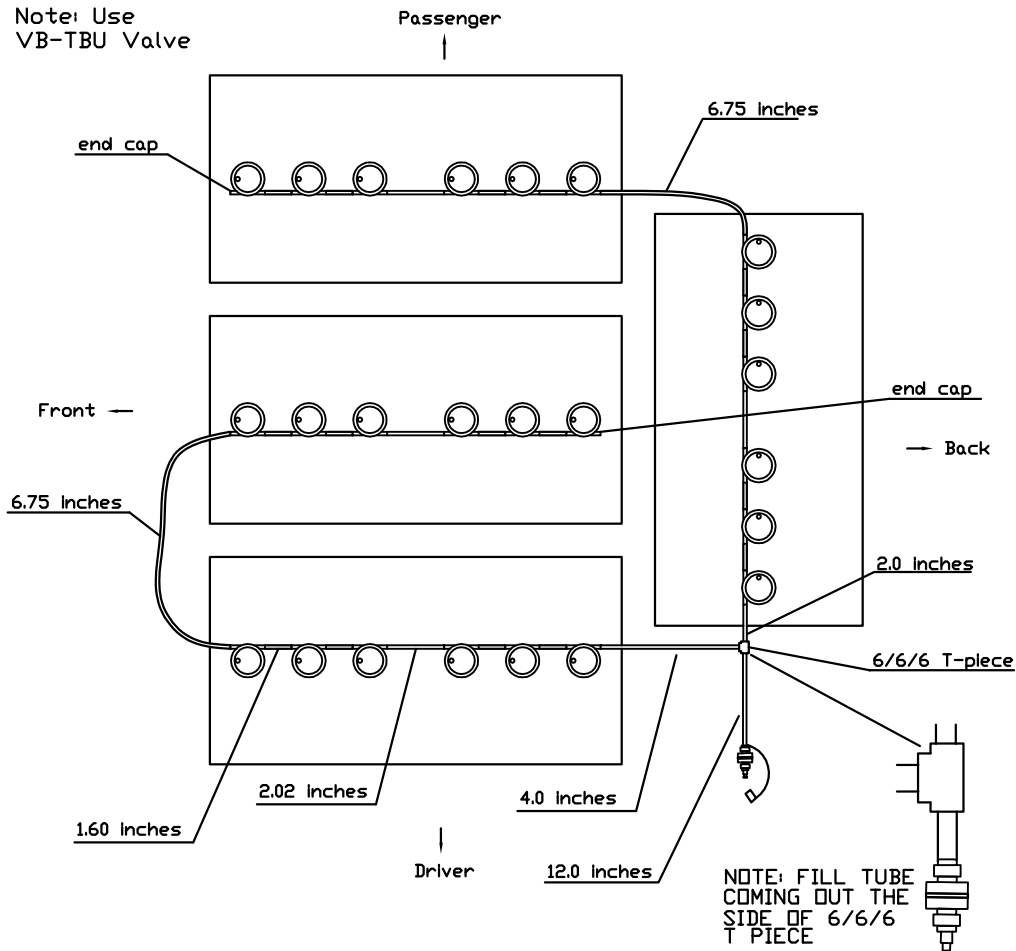

Please water batteries after charge and do not leave unattended



### Battery Vent Hole

**Note: This battery has an obstruction inside the vent well. Which can damage the valve if not installed properly. Please make sure the float is properly centered before snapping valve into vent well.**

#### Operation Instructions:

Please water batteries after charge and do not leave unattended

Connect the Delivery system (2 1/2 gallon tank, direct fill link, or direct fill gun) to single point on kit. Insert male quick connect into female to start water flow. When flow indicator stops spinning or all indicator eyes come to top of the plug, disconnect quick connect.

Always disconnect from water source after filling

6645 Holder Road,  
Clemmons, NC 27012

Phone: 336-714-0448  
Fax: 336-714-0449