



BATTERY WATERING TECHNOLOGIES






THE LEADER IN BATTERY WATERING TECHNOLOGY™

PART NUMBER: K2400B-GLFBCTBTJ8


VALVE: VB-TBU

CELL TO CELL DIMENSION: 2.3"


REV. 4 11/10/2016

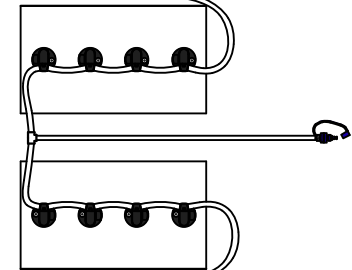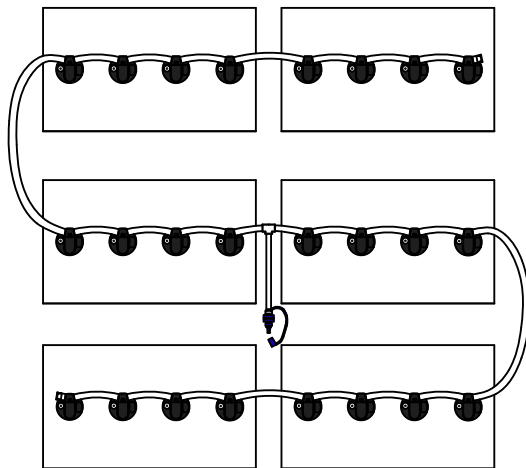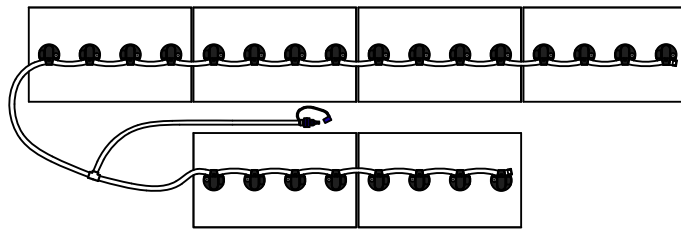

1. Place 4 end caps and 2 T-pieces into a 3x3 red ziplock bag
2. Place 7 ft of tubing into an 8x10 ziplock bag and add the 3x3 bag to this bag
3. Fully assemble the fill tube and place loose in the bag



4. Assemble 6 strings of 4 valves



This is a guide to installing a partially assembled kit. The diagram(s) above show the most common configurations. Make sure tubing clears battery cables and all obstructions. Only water batteries after charging

18 @ 1.90"
1 @ 18.0"
1 @ 7.0ft

PART #	DESCRIPTION	QTY.	SAFETY INFORMATION
VB-TBU	Strings of 4 Valves	6	<ul style="list-style-type: none"> • Prior to servicing any vehicle, please turn the key switch to the OFF position. • Do not service any vehicle while the charger cable is plugged into the vehicle or while it is moving. • Do not use any metal tools or have anything metal on your body while working over the batteries. • Wear proper safety protection such as safety glasses, face shield, and rubber gloves when installing or working with batteries. • If acid comes into contact with your skin, or eyes, flush with water and call a physician immediately.
08TUB6	Tubing	7ft	
08T666N	T Piece	3	
09BDCAP	Dust Cap	1	
09MBLU1	Male Connector	1	
08CAP6	End Cap	4	
			336-714-0448 www.batterywatering.com