




40 Batteries 120 Cell Kit Trojan L16-HC 6 Volt

Rev.1 3-5-09

SK12000B59-2

Please follow the sketch precisely as shown. Lay preassembled strings of valves on top of batteries as shown in the sketch. Push straight down on each valve until it snaps into the cell. Make sure all tubing remains unobstructed. If there are any questions concerning installation, please call Battery Watering Technologies at 877-522-5431

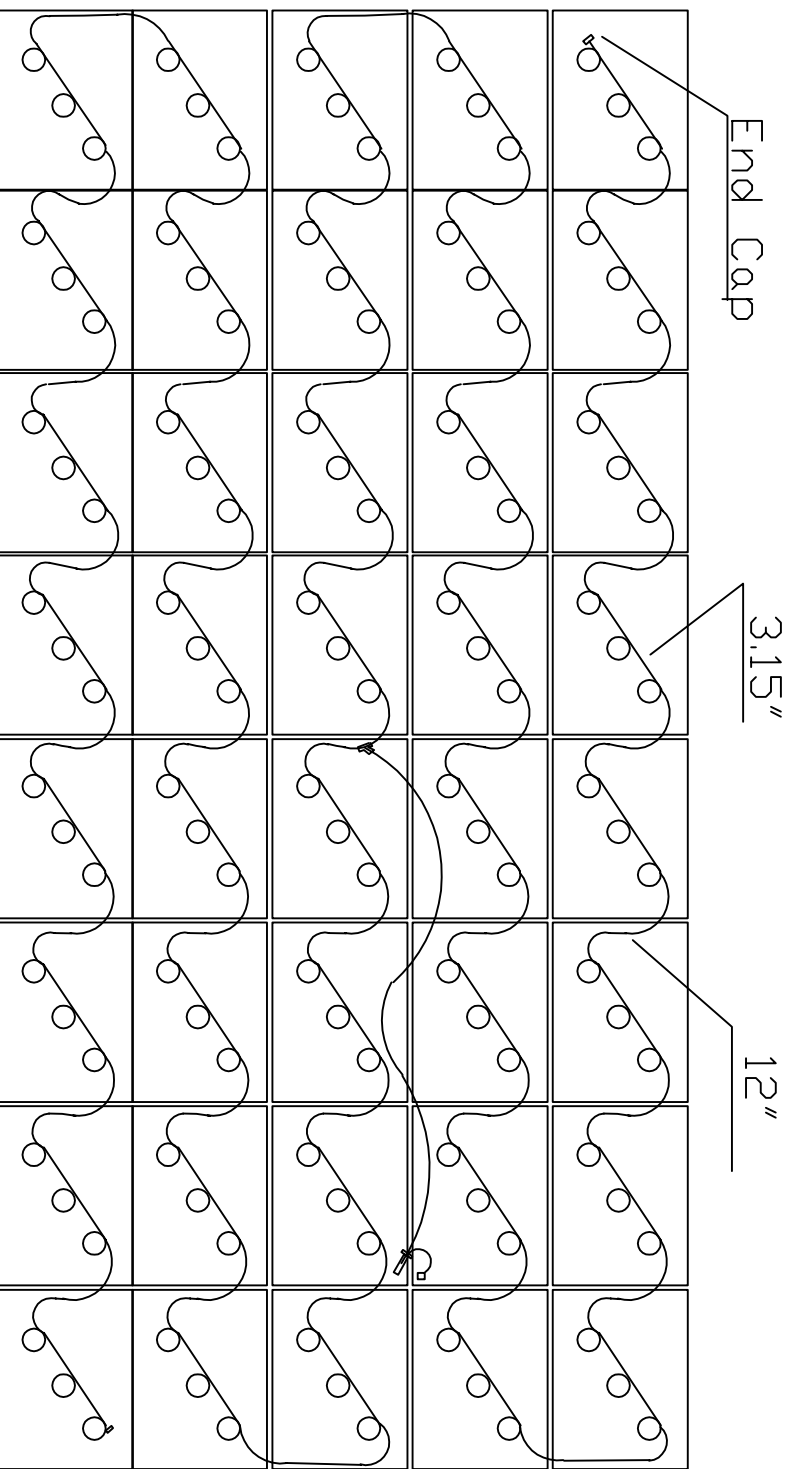

Cust Note: We suggest using the clamps at the end hose connections. Cut a section of tubing somewhere near the center of the battery and T in the fill tube after cutting it to desired length. Use clamps at the T as well. Fill the batteries until the flow indicator stops and only when in a fully charged state. For this application once every 3 weeks or even less should be sufficient.

6645 Holder rd. phone: 336-473-0448
Clemmons, NC. 27018 Fax: 336-473-0449