


DRAWING NUMBER: B-18-21-LP-111

18 CELL 21 PLATE (WITH OR WITHOUT COVER)

TRAY SIZE: 38.00" X 24.50"

A/B SWING

REV. 3 10/14/2013

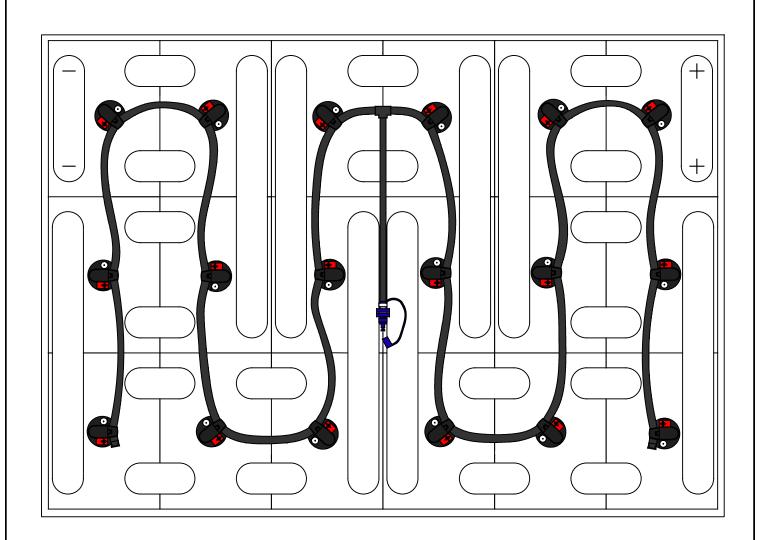

| PART # | DESCRIPTION | QTY. |
|-----------|---------------------|------|
| Various | Low Profile Valve | 18 |
| 08TUB6BLK | 6mm Tubing | 12' |
| 09BDCAP | Dust Cap | 1 |
| 08CAP6 | End Cap | 2 |
| 08T666N | T Piece 6-6-6 | 1 |
| 09MBLU1 | 1/4" Male Connector | 1 |
| - | - | - |
| - | - | - |

INSTALLATION INSTRUCTIONS

Only water batteries after charging. Do not leave unattended.

- 1. Remove existing battery caps.
- 2. Ensure the electrolyte level is covering the plates in each cell. If not, add just enough water to cover the plates.
- 3. Following the diagram above, insert the valves into the vent holes.
- 4. Push straight down on each valve until it snaps into the cell.
- 5. Make sure all tubing remains unobstructed.

336-714-0448 www.batterywatering.com