


DRAWING NUMBER: B-24-7-LP-261

24 CELL 7 PLATE

(WITH OR WITHOUT COVER)

TRAY SIZE: 31.75" X 14.25"

REV. 0 05/26/2016

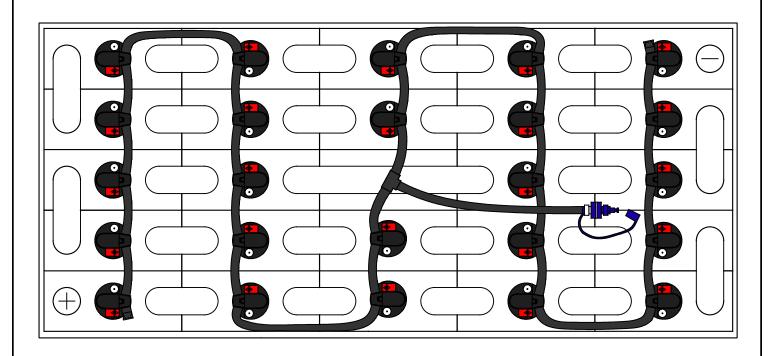

| PART #    | DESCRIPTION         | QTY. |
|-----------|---------------------|------|
| Various   | Low Profile Valve   | 24   |
| 08TUB6BLK | 6mm Tubing          | 9'   |
| 09BDCAP   | Dust Cap            | 1    |
| 08CAP6    | End Cap             | 2    |
| 08T666N   | T Piece 6-6-6       | 1    |
| 09MBLU1   | 1/4" Male Connector | 1    |
| -         | -                   | -    |
| -         | -                   | -    |

## **INSTALLATION INSTRUCTIONS**

Only water batteries after charging. Do not leave unattended.

- 1. Remove existing battery caps.
- Ensure the electrolyte level is covering the plates in each cell. If not, add just enough water to cover the plates.
- 3. Following the diagram above, insert the valves into the vent holes.
- 4. Push straight down on each valve until it snaps into the cell.
- 5. Make sure all tubing remains unobstructed.

336-714-0448 www.batterywatering.com