



# BATTERY WATERING TECHNOLOGIES

THE LEADER IN BATTERY WATERING TECHNOLOGY™

DRAWING NUMBER: B-40-23-LP-145


40 CELL

23 PLATE

(WITH OR WITHOUT COVER)

TRAY SIZE: 45.94" X 28.94"

REV. 0 08/28/2014

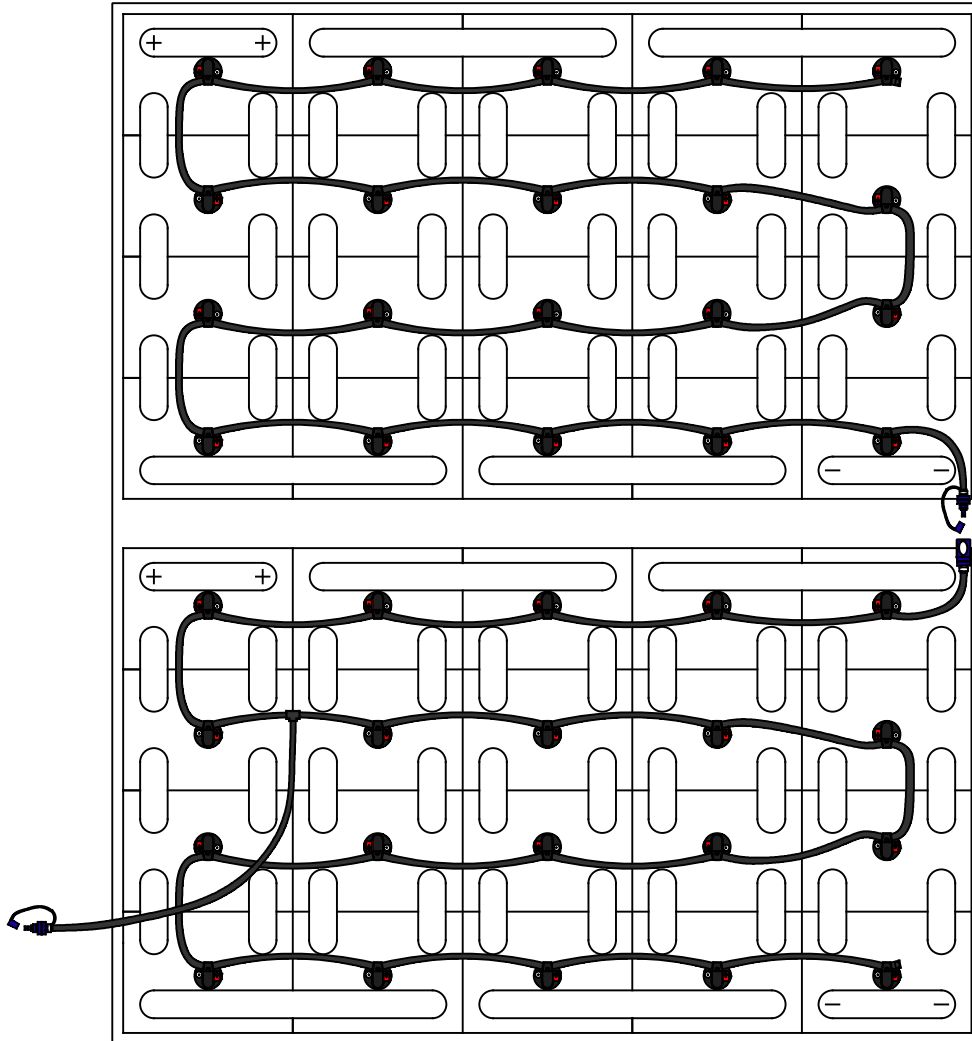

Connect Male and Female Connectors at Install

PART #	DESCRIPTION	QTY.
Various	Low Profile Valve	40
08TUB6BLK	6mm Tubing	30'
09BDCAP	Dust Cap	2
08CAP6	End Cap	2
08T666N	T Piece 6-6-6	1
09MBLU1	1/4" Male Connector	2
09FBLU6	1/4" Female Connector	1
-	-	-

## INSTALLATION INSTRUCTIONS

*Only water batteries after charging. Do not leave unattended.*

1. Remove existing battery caps.
2. Ensure the electrolyte level is covering the plates in each cell. If not, add just enough water to cover the plates.
3. Following the diagram above, insert the valves into the vent holes.
4. Push straight down on each valve until it snaps into the cell.
5. Make sure all tubing remains unobstructed.

336-714-0448

[www.batterywatering.com](http://www.batterywatering.com)