

BATTERY WATERING TECHNOLOGIES

THE LEADER IN BATTERY WATERING TECHNOLOGY"


DRAWING NUMBER: B-40-9-LP-253

40 CELL 9 PLATE

(WITH OR WITHOUT COVER)

TRAY SIZE: 50.38" X 18.13"

REV. 0 03/29/2016

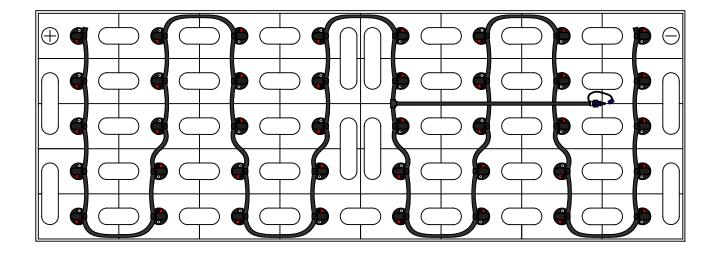

PART #	DESCRIPTION	QTY.	
Various	Low Profile Valve	40	
08TUB6BLK	6mm Tubing	15'	
09BDCAP	Dust Cap	1	
08CAP6	End Cap	2	
08T666N	T Piece 6-6-6	1	4
09MBLU1	1/4" Male Connector	1	
-	-	-	
-	-	-	

INSTALLATION INSTRUCTIONS Only water batteries after charging. Do not leave unattended.

1. Remove existing battery caps.

- 2. Ensure the electrolyte level is covering the plates in each cell. If not, add just enough water to cover the plates.
- 3. Following the diagram above, insert the valves into the vent holes.
- 4. Push straight down on each valve until it snaps into the cell.
- 5. Make sure all tubing remains unobstructed.

336-714-0448 www.batterywatering.com