





# 24 Cell kit for Crown and Trojan 12 Volt Batteries

Rev. 0 8-27-13


Part # K2400B-GLFBCTBTRCR

This is a guide to assembling a 24 cell basic kit. The diagrams below show the most common 24 cell configurations. Make sure all hoses clear battery cables and all obstructions. Always water battery after charging is complete.

Note: Use VB-TBY

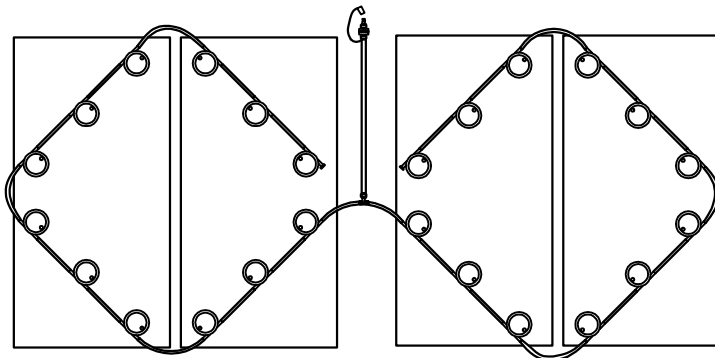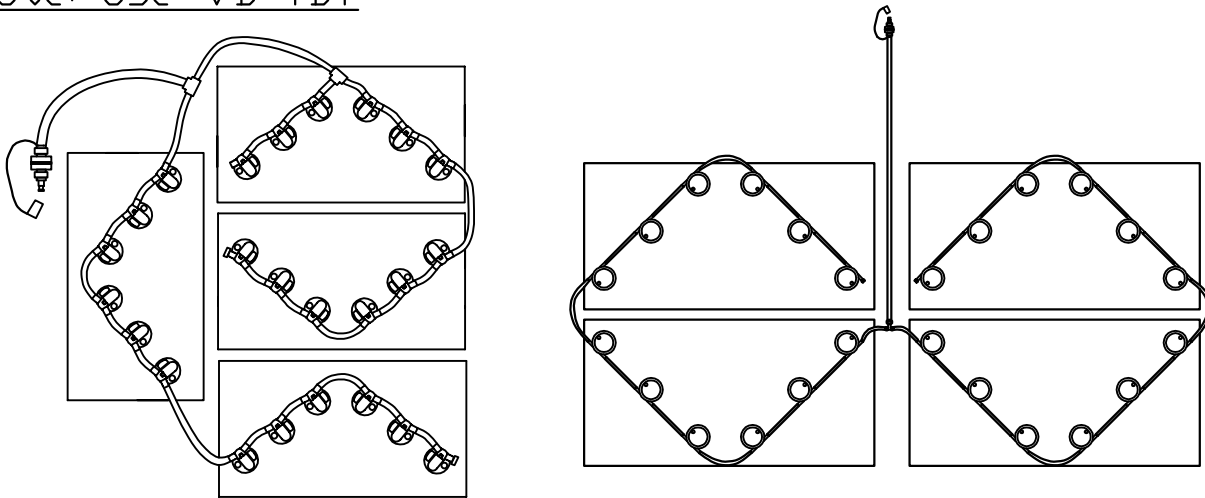

1. Place 4 end caps and 2 T-pieces into a 3x3 red ziplock bag
2. Place 9 ft of tubing into a 8x10 ziplock bag and add the 3x3 bag to this bag
3. Fully assemble the fill tube and place loose in the bag

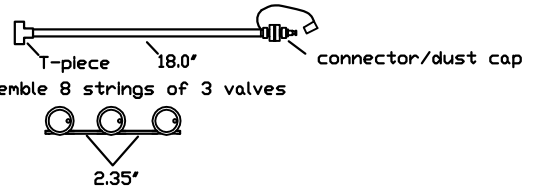

4. Assemble 8 strings of 3 valves

Part #	Description	Quantity
VB-TBY	String of 3 valves, 2.35' tubing	8
08TUB6K	1/4" Tubing	9 ft.
09MBLU1	1/4 Male Connector	1
09BDCAP	Dust cap	1
08T666N	6-6-6 T Piece	3
08CAP6	End cap	4
	Instruction Label	1

Operation Instructions:

Please water batteries after charge and do not leave unattended

Connect the Delivery system (2 1/2 gallon tank, direct fill link, or direct fill gun) to single point kit. Insert male quick connect into female to start water flow. When flow indicator stops spinning or all indicator eyes come to top of the valve, disconnect the quick connect.

Always disconnect from water source after filling